



EN 60598-2-22 - UNE 20392-93
230V 50/60 Hz - PC - IP66 - IK07

HERMETIC XL



PLUG-IN
EINSTECKBAR
PLUG-IN

Base a innesto | Plug-in base | Einsteckbare Basis

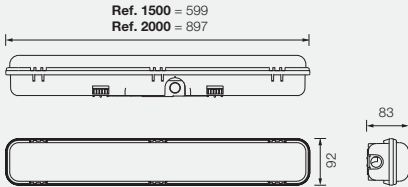

	Ref.	W	Lm					
SOLO EMERGENZA	1LE DE 1500L	18 W	1330 lm	LED	1 h	7,2 V · 2,0 Ah NiCd	700	12
NON-MAINTAINED	1LE DE 2000L	36 W	1960 lm	LED	1 h	7,2 V · 2,0 Ah NiCd	700	12
BEREITSCHAFT								

	Ref.	W	Lm					
SEMPRE ACCESA	1LE DEL 1500	18 W	1330 lm	LED	1 h	7,2 V · 2,0 Ah NiCd	700	12
MAINTAINED	1LE DEL 2000	36 W	1960 lm	LED	1 h	7,2 V · 2,0 Ah NiCd	700	12
DAUER								



	Ref.	W	Lm					
AUTOTEST SE	1LE DEA 1500L	18 W	1330 lm	LED	1 h	3,6 V · 0,30 Ah NiCd	700	12
AUTOTEST SE	1LE DEA 2000L	36 W	1960 lm	LED	1 h	3,6 V · 0,30 Ah NiCd	700	12
SELBSTTEST SE								

	Ref.	W	Lm					
AUTOTEST SA	1LE DEAL 1500	18 W	1330 lm	LED	1 h	7,2 V · 2,0 Ah NiCd	700	12
AUTOTEST SA	1LE DEAL 2000	36 W	1960 lm	LED	1 h	7,2 V · 2,0 Ah NiCd	700	12
SELBSTTEST SA								

	Ref.	W	Lm					
SISTEMA WIRELESS SE	1LE DEI 1500LR	18 W	1330 lm	LED	1 h	7,2 V · 2,0 Ah NiCd	700	12
WIRELESS SYSTEM SE	1LE DEI 2000LR	36 W	1960 lm	LED	1 h	7,2 V · 2,0 Ah NiCd	700	12
DRAHTLOS SE								

	Ref.	W	Lm					
SISTEMA WIRELESS SE+SA	1LE DEIL 1500R	18 W	1330 lm	LED	1 h	7,2 V · 2,0 Ah NiCd	700	12
WIRELESS SYSTEM SE + SA	1LE DEIL 2000R	36 W	1960 lm	LED	1 h	7,2 V · 2,0 Ah NiCd	700	12
DRAHTLOS SE + SA								

	Ref.	W	Lm					
SISTEMA CABLATO SE	1LE DEI 1500L	18 W	1330 lm	LED	1 h	7,2 V · 2,0 Ah NiCd	700	12
WIRED SYSTEM SE	1LE DEI 2000L	36 W	1960 lm	LED	1 h	7,2 V · 2,0 Ah NiCd	700	12
KABELSYSTEM SE								

	Ref.	W	Lm					
SISTEMA CABLATO SE+SA	1LE DEIL 1500	18 W	1330 lm	LED	1 h	7,2 V · 2,0 Ah NiCd	700	12
WIRED SYSTEM SE + SA	1LE DEIL 2000	36 W	1960 lm	LED	1 h	7,2 V · 2,0 Ah NiCd	700	12
KABELSYSTEM SE+ SA								

	Ref.	W	Lm					
SISTEMA CABLATO SE+SA DALI	1LE DEIDL 1500	18 W	1330 lm	LED	1 h	7,2 V · 2,0 Ah NiCd	700	12
WIRED SYSTEM SE + SA DALI	1LE DEIDL 2000	36 W	1960 lm	LED	1 h	7,2 V · 2,0 Ah NiCd	700	12
KABELSYSTEM SE + SA DALI								