


EN 60598-2-22 - EN 50018
230V 50/60 Hz - IP67 - IK07


ANTIDEFLAGRANTE
EXPLOSION PROOF
EXPLOSIONSSICHER



CATEGORIA 2 secondo ATEX 94/9/CE
CATEGORY 2 as per ATEX 94/9/CE
KATEGORIE 2 gemäß ATEX 94/9/CE

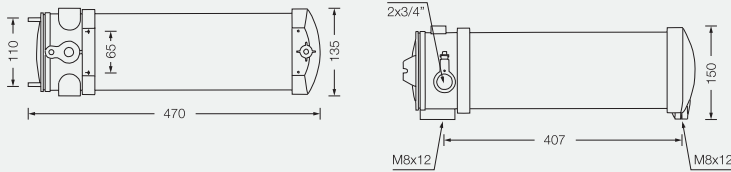

	Ref.	Lm				
SOLO EMERGENZA	1LE EX 200	220 lm	PL-S 9W/84	1 h	4,8 V · 1,5 Ah NiCd	1
NON-MAINTAINED	1LE EX 400	410 lm	PL-S 11W/84	1 h	4,8 V · 4,0 Ah NiCd	1
BEREITSCHAFT						
	Ref.	Lm				
AUTOTEST	1 LE EXA 200	220 lm	PL-S 9W/84	1 h	4,8 V · 1,5 Ah NiCd	1
AUTOTEST	1 LE EXA 400	410 lm	PL-S 11W/84	1 h	4,8 V · 4,0 Ah NiCd	1
SELBSTTEST						
	Ref.	Lm				
SISTEMA WIRELESS	1 LE EXI 200R	220 lm	PL-S 9W/84	1 h	4,8 V · 1,5 Ah NiCd	1
WIRELESS SYSTEM	1 LE EXI 400R	410 lm	PL-S 11W/84	1 h	4,8 V · 4,0 Ah NiCd	1
DRAHTLOS						
	Ref.	Lm				
SISTEMA CABLATO	1 LE EXI 200	220 lm	PL-S 9W/84	1 h	4,8 V · 1,5 Ah NiCd	1
WIRED SYSTEM	1 LE EXI 400	410 lm	PL-S 11W/84	1 h	4,8 V · 4,0 Ah NiCd	1
KABELSYSTEM						

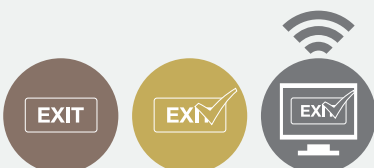

PERRY
Emergency